
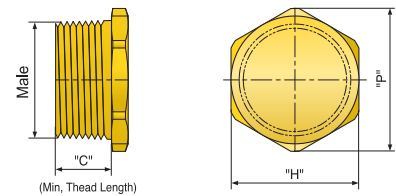



STOPPING PLUG

Application



- For closing unused cable gland entries and keep in due conditions of protections - Ex 'd' and Ex 'e'
- Entry threads : Metric & NPT
- Flameproof(Ex'd') & Increased Safety(Ex'e')
- Ingress Protection : IP66/67
- Operating Temperature : -60°C to +100°C
- Material : Brass, Brass with Nickel plated, Aluminum & Stainless Steel 316(L)
- Certificate No : Baseefa08 ATEX 0051U & IECEx BAS 08.0020U & Baseefa10 ATEX 0024X & IECEx BAS 10.0062X.
Sira 12ATEX1105X / IECEx SIR 12.0041X
TR-CU : 0338518

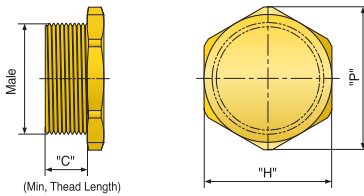

HAZARDOUS AREA CABLE GLAND

Entry Thread Size (Metric)	Part No	Thread size (Metric) "M"	Hexagon Dimensions		Min. Thread Length "C"
			"H"	"P"	
M16	DASP-H-M16	M16X1.5	20	22	15
M20	DASP-H-M20	M20X1.5	24	26.8	
M25	DASP-H-M25	M25X1.5	30	33.5	
M32	DASP-H-M32	M32X1.5	36	40.5	
M40	DASP-H-M40	M40X1.5	45.8	51.2	
M50	DASP-H-M50	M50X1.5	55	61.5	
M63	DASP-H-M63	M63X1.5	70	77	
M75	DASP-H-M75	M75X1.5	80	88.5	
M80	DASP-H-M80	M80X2.0	95	104	20
M90	DASP-H-M90	M90X2.0	105	114	
M100	DASP-H-M100	M100X2.0	115	123.5	

Entry Thread Size (NPT)	Part No	Thread size (NPT) "N"	Hexagon Dimensions		Min. Thread Length "C"
			"H"	"P"	
NPT 1/2"	DASP-H-N12	1/2"	24	26.8	15
NPT 3/4"	DASP-H-N34	3/4"	30	33.5	15
NPT 1"	DASP-H-N1	1"	36	40.5	17
NPT 1 1/4"	DASP-H-N114	1 1/4"	45.8	51.2	17
NPT 1 1/2"	DASP-H-N112	1 1/2"	50	55	17
NPT 2"	DASP-H-N2	2"	63	69	18
NPT 2 1/2"	DASP-H-N212	2 1/2"	75	83	25
NPT 3"	DASP-H-N3	3"	95	104.5	28
NPT 3 1/2"	DASP-H-N312	3 1/2"	105	115	29
NPT 4"	DASP-H-N4	4"	120	131	30

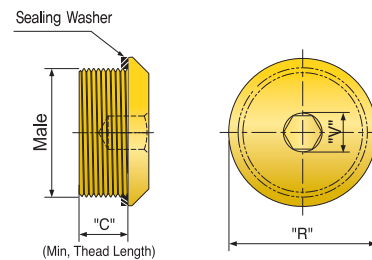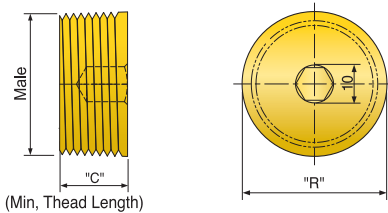

Entry Thread Size (NPT)	Part No	Thread size (NPT) "N"	Round Dimensions "R"	Min. Thread Length "C"
NPT 1/2"	DASP-SH-N12	1/2"	21.6	15
NPT 3/4"	DASP-SH-N34	3/4"	26.9	15
NPT 1"	DASP-SH-N1	1"	33.6	17
NPT 1 1/4"	DASP-SH-N114	1 1/4"	42.4	17
NPT 1 1/2"	DASP-SH-N112	1 1/2"	48.4	17
NPT 2"	DASP-SH-N2	2"	60.5	18
NPT 2 1/2"	DASP-SH-N212	2 1/2"	73.2	25
NPT 3"	DASP-SH-N3	3"	89.1	28
NPT 3 1/2"	DASP-SH-N312	3 1/2"	101.8	29
NPT 4"	DASP-SH-N4	4"	114.4	30

Entry Thread Size (Metric)	Part No	Thread size (Metric) "M"	Round Dimension "R"	Allen Key size "V"	Min. Thread Length "C"
M16	DASP-SH-M16	M16X1.5	22.5	8.2	15
M20	DASP-SH-M20	M20X1.5	26.5	10.2	
M25	DASP-SH-M25	M25X1.5	32	10.2	
M32	DASP-SH-M32	M32X1.5	39.5	10.2	
M40	DASP-SH-M40	M40X1.5	48	10.2	
M50	DASP-SH-M50	M50X1.5	58	10.2	
M63	DASP-SH-M63	M63X1.5	73	14.2	
M75	DASP-SH-M75	M75X1.5	85	14.2	
M80	DASP-SH-M80	M80X2.0	95	19.3	20
M90	DASP-SH-M90	M90X2.0	105	19.3	
M100	DASP-SH-M100	M100X2.0	115	19.3	

Marking detail :



I M2 and/or II 2GD Ex d e IIC Mb Gb Ex tb II C Db IP67 IECEx SIR 12.0041X, Sira 12 ATEX 1105X (-60°C ≤ Ta ≤ +100°C) DASP-SH-M*** 2012/3 DONG-A Bucheon Korea