



STAINLESS STEEL TIES

REUSABLE TIES



- Ideal for telecommunications and oil rig, application
- Resistant to extremely corrosive and hazardous environments
- For single or double wrap applications
- Coating : EP-E Black
- Material : type 316 or 304 stainless steel
- Standard pack : 100per bag
- Coated thickness : 0.6mm (.021")

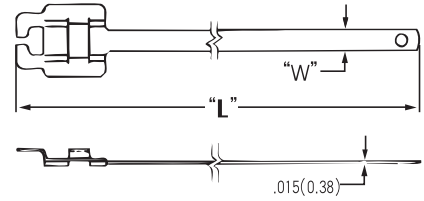


Part No	Bundle Dia mm(inch)	"L" Length mm(inch)	"W" Width mm(inch)	Single		Double	
				Min. Loop Tensile LBS.(N)	Clamp Force LBS.(N)	Min. Loop Tensile LBS.(N)	Clamp Force LBS.(N)
SRT-229-6	63(2.5)	229(9)	6(.24)	75 (334)	0-100 (0-445)	300 (1334)	0-100 (0-445)
SRT-305-6	86(3.5)	305(12)					
SRT-457-6	144(5.7)	457(18)					
SRT-610-6	193(7.6)	610(25)					
SRT-229-9	63(2.5)	229(9)	9(.35)	75 (334)	0-100 (0-445)	300 (1334)	0-100 (0-445)
SRT-305-9	86(3.5)	305(12)					
SRT-457-9	144(5.7)	457(18)					
SRT-610-9	193(7.6)	610(25)					
SRTC-229-6	63(2.5)	229(9)	6(.24)	100 (445)	0-100 (0-445)	500 (2224)	0-150 (0-667)
SRTC-305-6	86(3.5)	305(12)					
SRTC-457-6	144(5.7)	457(18)					
SRTC-610-6	193(7.6)	610(25)					
SRTC-229-9	63(2.5)	229(9)	9(.35)	100 (445)	0-100 (0-445)	500 (2224)	0-150 (0-667)
SRTC-305-9	86(3.5)	305(12)					
SRTC-457-9	144(5.7)	457(18)					
SRTC-610-9	193(7.6)	610(25)					

RELEASABLE TIES



- For single or double wrap application
- Coating : EP-E Black
- Material : type 316 or 304 stainless steel
- Color : black
- standard pack : 100 per bag

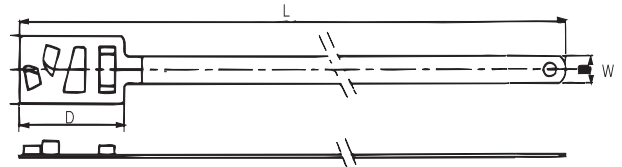

Part No	Bundle Dia mm(inch)	"L" Length mm(inch)	"W" Width mm(inch)	STD PKG
AST-229	63(2.5)	229(9)	6(.24)	100
AST-305	86(3.5)	305(12)		
AST-350	100(3.9)	350(13.7)		
AST-229H	63(2.5)	229(9)	9(.35)	
AST-305H	86(3.5)	305(12)		
AST-457H	144(5.7)	457(18)		
AST-610H	193(7.6)	610(25)		
ASTC229-6	63(2.5)	229(9)	6(.24)	100
ASTC305-6	86(3.5)	305(12)		
ASTC350-6	100(3.9)	350(13.7)		
ASTC229-9	63(2.5)	229(9)	9(.35)	
ASTC305-9	86(3.5)	305(12)		
ASTC457-9	144(5.7)	457(18)		
ASTC610-9	193(7.6)	610(25)		

DOUBLE-WRAP STAINLESS STEEL TIE

- Material : Stainless Steel 304 & 316(316L)
- Short Circuit Current Test : Single Cable: 75kA (Peak / 1 sec)
Multi Cable: 80kA (Peak / 1sec)



Part No	DESCRIPTION
RBC-DW-16	16mm width PVC or Nylon Coated.