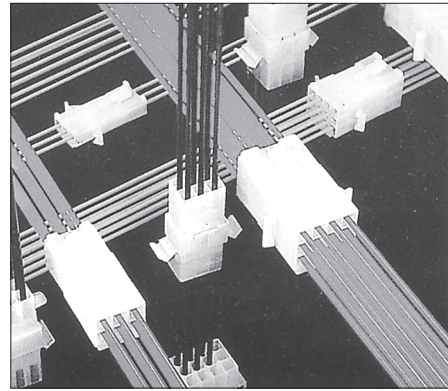


φ 2.0 CONNECTOR

● Features

- Home Appliances Connectors
- It can be used both in single and multiple connectors and either wire to wire interconnection or wire to board interconnection.
- Double locking both housing and terminals.



● Pannel Hole Sizes

- Panel Thickness : 0.8mm ~ 2.0mm

Fig 1.	Dimension (mm)					PART NO.	
	A	B	C	D	E		
		18.8	7.8	11.0	3.7	DARH 200-02	Fig 1.
		25.0	7.8	11.0	3.7	DARH 200-03	
		31.2	7.8	11.0	3.7	DARH 200-04	
	13.8	18.8	9.4	14.1	4.0	DARH 200-04T	Fig 2.
	20.0	25.0	9.4	14.1	4.0	DARH 200-06	
	20.0	25.0	9.4	20.3	4.0	DARH 200-09	
	26.2	31.2	12.8	20.3	4.0	DARH 200-12	
	32.4	37.4	12.8	20.3	4.0	DARH 200-15	

● Terminals

Fig 1.	PART NO.	Wire range AWG(mm ²)	Dimension (mm)		Type
			L	A	
	HP-200S	24-20 (0.2-0.5)	20.3	12.6	Fig 1.
	HP-200H	18-14 (0.75-2.0)	20.3	12.6	
	HP-200T	20+20, 20+18 20+16, 18+18	20.3	12.6	
	HR-200S	24-20 (0.2-0.5)	20.3	12.6	Fig 2.
	HR-200H	18-14 (0.75-2.0)	20.3	12.6	
	HR-200M		20.3	12.6	
	HR-200T	20+20, 20+18 20+16, 18+18	20.3	12.6	

Thickness : 0.25mm Material : Brass / Tin-Plate




















● How To Order

HP - 200 S

HP : Housing Pin
 HR : Housing Receptacle
 S : Small Wire
 H : Heavy Wire
 T : 2 Wire
 M : Multi
 130 : φ 1.3
 200 : φ 2.0

φ 2.0 CONNECTOR

HOUSINGS

Current rating	Plug(Female)	Receptacle(Male)	Plug(Female)	Receptacle(Male)	Current rating
15	DAFH 200-02 	DARH 200-02N 	DAFH 200-09 	DARH 200-09 	10
		DARH 200-02 			
14	DAFH 200-03 	DARH 200-03 	DAFH 200-12 	DARH 200-12 	9
13	DAFH 200-04T 	DARH 200-04T 	DAFH 200-12K 	DARH 200-12K 	9
13	DAFH 200-04 	DARH 200-04 	DAFH 200-15 	DARH 200-15 	9
12	DAFH 200-06 	DARH 200-06 			

Voltage rating : 300V
 Current rating : See above